

09/11/00
Jc880 U.S. PTO

09-12-00
CHRISTOPHER P. MAIORANA, P.C.

24025 Greater Mack, Suite 200
St. Clair Shores, Michigan 48080

Utility Patent Application Transmittal
(Only for new non-provisional applications Under 37 CFR 1.53(b))

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D. C. 20231

Case Docket No. 0325.00418

Date: September 11, 2000

A
Jc846 U.S. PTO
09/658597
09/11/00

Sir:

Transmitted herewith for filing is a patent application of:

Inventor(s): Steven P. Larky, Paul Berndt, Mike Lewis and Scott Swindle

For: UNIVERSAL SERIAL BUS (USB) GOLDEN PRODUCTION TEST MODE

Enclosed are:

1. ☒ Specification (22 pages); Claims (5 pages); Abstract (1 page)
2. ☒ 4 sheets of formal drawings.
3. ☒ Oath or Declaration Total Pages 4
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Item 5 completed)
 - c. ☐ Copy of Revocation of Previous Power
4. ☐ Incorporation By Reference (usable if Item 3b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Item 3b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
5. ☐ If a Continuing Application, check appropriate box and supply the requisite information below and in a preliminary amendment:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP)
of prior application no.:
6. ☒ An assignment to CYPRESS SEMICONDUCTOR CORP. along with PTO form 1595.
7. ☐ A PTO Form 1449 with a copy of the references not previously cited.
8. ☒ Return Receipt Postcard
9. ☐ Other:

The filing fee has been calculated as shown below:

	No. Filed	No. Extra	Fee	Amount
Basic Fee	--	--	--	\$690.00
Total Claims	20	0	x \$ 18.00	\$ 0.00
Indep. Claims	3	0	x \$ 78.00	\$ 0.00
Mult. Dep. Claims			\$260.00	\$ 0.00

SUB-TOTAL \$690.00

SMALL ENTITY STATUS (divide SUB-TOTAL by two) \$

X Assignment Recordal Fee (\$40.00) \$ 40.00

TOTAL \$730.00

X A check in the amount of \$730.00 to cover the filing fee is enclosed.

X The Commissioner is hereby authorized to charge any fees under 37 CFR 1.16 and 1.17 which may be required by this paper or associated with this filing to Deposit Account No. 50-0541. A duplicate copy of this sheet is enclosed.

Correspondence Address:



Customer Number or Bar Code Label:

21363

PATENT TRADEMARK OFFICE

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited with the United States Postal Service via Express Mail Label No. EL573625244US in an envelope addressed to: BOX PATENT APPLICATION, Assistant Commissioner for Patents, Washington, D.C. 20231, on September 11, 2000.

By:

Mary Donna Berkley
Mary Donna Berkley

Respectfully submitted,

By

Christopher P. Maiorana
Christopher P. Maiorana
Reg. No. 42,829
CHRISTOPHER P. MAIORANA, P.C.
24025 Greater Mack, Suite 200
St. Clair Shores, Michigan 48080
(810) 498-0670

Date: September 11, 2000

Attorney Docket No.: 0325.00418

UNIVERSAL SERIAL BUS (USB) GOLDEN PRODUCTION TEST MODE

Field of the Invention

The present invention relates to a method and/or
5 architecture for verifying operation of a Universal Serial Bus
(USB) device generally and, more particularly, to a method and/or
architecture for verifying operation of a USB device with a
production test mode device.

Background of the Invention

The Universal Serial Bus (USB) Specification, Version
2.0, (published April 2000 and hereby incorporated by reference in
its entirety) defines a high speed mode that operates at 480 MHz.
Testing of such high speed devices can be difficult. Conventional
15 solutions for implementing high speed testing include: (i) running
tests on an expensive tester capable of 480 MHz operation; (ii) not
performing at speed production testing (i.e., assuming the part is
correct by design and operates at the high speed) and/or (iii)
using a golden parts tester implementation for comparison purposes.
20 A golden parts tester is a test-mode capable slave device,

0325.00418

CD00117

identical to the device which is being tested, that is capable of performing tests. There are disadvantages to each of the conventional approaches.

The first approach of simply implementing a high speed
5 tester capable of 480 MHz testing is not a cost effective solution. Conventional high speed testers capable of 480 MHz operation and able to process a USB 2.0 design (which is largely digital) are at the state of the art in testers and, therefore, expensive. Furthermore, even a fast tester (i.e., a 480 MHz tester) can be problematic. Conventional at speed testers implement an internal phase lock loop (PLL) at 480 MHz. Synchronization of the 480 MHz
10 tester to an incoming data rate is difficult. Verification of the incoming data rate is also difficult. Conventional high speed testers require a complex scheme to synchronize to a device under
15 test (DUT). Additionally, the PLL will vary in phase from device to device and from test to test.

The second approach of not performing at speed production testing implies that the device is correct by design and well within the specification limits with a sufficient margin, as proven
20 by full characterization. Specifically, not performing 480 MHz testing does not require expensive testing devices. Not performing

0325.00418

CD00117

at speed testing assumes that there are no plausible defects that can inhibit at speed operation (i.e., 480 MHz operation).

The approach of implementing a golden parts tester implementation (i.e., a replica of a target-only device implemented as a tester) for comparison purposes is not a possible tester solution for non peer-to-peer devices. The golden parts tester implementation cannot allow a replica of a target-only device to test another target-only device. A non peer-to-peer device (i.e., a USB device) cannot communicate to another non peer-to-peer device since they are non peer-to-peer devices.

USB implementations require a master and a slave device. However, slave devices cannot initiate communication. The golden part device expects to be a target (i.e., a slave) device and not a control (i.e., master) device. The golden parts tester cannot be implemented for a non peer-to-peer device, since peer-to-peer devices are not target-only devices. For example, a USB bus is not a peer-to-peer bus and the golden parts tester implementation is unable to communicate with another target-only device.

Therefore, it is desirable to provide a method and/or architecture to (i) enable slave devices to test other slave devices and/or (ii) add test mode enhanced slave device

0325.00418
CD00117

capabilities to a tester in order to test other non test mode slave devices.

Summary of the Invention

5 One embodiment of the present invention concerns an apparatus comprising a plurality of target devices. At least one of the plurality of target devices may be configured as a control test device and may be capable of performing testing of the plurality of test devices.

10 Another embodiment of the present invention concerns an apparatus coupled to a low speed tester and a device. The apparatus may be configured to allow the low speed tester to perform high speed tests of the device.

15 The objects, features and advantages of the present invention include providing a method and/or architecture for verifying operation of a USB device that may (i) allow a low cost tester to verify high speed functionality, (ii) verify functionality of a part, (iii) enhance capabilities of a tester, (iv) create a test mode control (e.g., master) function in a target
20 (e.g., slave) device and/or (v) allow testing of a target device by reconfiguring a replica of a target device as a control device.

Brief Description of the Drawings

These and other objects, features and advantages of the present invention will be apparent from the following detailed description and the appended claims and drawings in which:

5 FIG. 1 is a block diagram of a preferred embodiment of the present invention;

FIG. 2 is a flow diagram illustrating an operation of the present invention of FIG. 1;

10 FIG. 3 is a block diagram of a preferred embodiment of the present invention; and

FIG. 4 is a flow diagram illustrating an operation of the present invention of FIG. 3.

Detailed Description of the Preferred Embodiments

15 The present invention may provide a method and/or architecture to verify a peripheral device (e.g., a USB 2.0 device) at a high speed operating frequency (e.g., 480 MHz). The present invention may provide such a verification in a production test facility without having to resort to an expensive tester capable of
20 direct 480 MHz testing. The present invention may enhance an otherwise incapable tester device to perform testing of high speed

devices. The present invention may provide a control test (e.g., master) function in a target (e.g., slave) device. Additionally, the present invention may test a target device by reconfiguring a replica of the target device as a control test device (e.g., a golden part).

Referring to FIG. 1, a block diagram of a circuit 100 is shown in accordance with a preferred embodiment of the present invention. The circuit 100 may illustrate a testing implementation of a target device by reconfiguring a replica of the target device as a test control device (golden part). The structure of the circuit 100 generally comprises a block (or circuit) 102 and a block (or circuit) 104. In one example, the circuit 102 may be implemented as a golden part and the circuit 104 may be implemented as a device under test (DUT). However, the circuit 102 and the circuit 104 may each be implemented as another appropriate type device in order to meet the criteria of a particular implementation.

Initially, the golden part 102 may need to be tested and/or configured during fabrication. The golden part 102 may be required to be pre-tested to ensure full functionality. The golden part 102 may be similar and/or identical to the DUT 104. The

0325.00418

CD00117

circuit 102 may be implemented as a golden part to transmit and receive data to/from the DUT 104. The golden part 102 may implement a number of test modes in order to thoroughly test the DUT 104 (via transmit and receive operations). For example, the test modes may be implemented to test high speed operation, low speed operation, power down operation, suspend operation, etc. However, the golden part 102 and the DUT 104 may be required to be in a test mode operation in order to provide testing. The test modes of the golden part 102 and the DUT 104 may be asserted/deasserted by an external device (not shown). In a preferred implementation, the test modes may be controlled by a tester.

The circuit 102 may be implemented as a control device and the circuit 104 may be implemented as a target device. The circuit 102 may be configured via a number of input pins. For example, a particular test mode may be selected via a predetermined criteria. The golden part 102 and the DUT 104 may be configured to transfer and receive data in a target (e.g., slave) and control test (e.g., master) type configuration. The DUT 104 may be implemented as a target (e.g., slave) device of the golden part 102. The transmission and reception of the master/slave type

0325.00418
CD00117

configurations of the DUT 104 may allow the circuit 100 to verify both a transmit and receive operation of the DUT 104. The DUT 104 may transmit a packet of data in response to the golden part 102. The circuit 102 and/or the circuit 104 may be controlled by a
5 tester, state machine, etc. Additionally, the circuit 102 and the circuit 104 may be implemented on a single tester loadboard.

The golden part 102 may be similar to the DUT 104. In particular, the golden part 102 may be a replica of the DUT 104. However, the golden part 102 may be reconfigured to provide a
10 testing interface with the DUT 104. The golden part 102 may be reconfigured through conventional input/output pins when in the test mode. A test command may be received at an input (e.g., M0, M1 and/or M2) of the golden part 102 and/or the DUT 104. The test commands may be initiated by a tester, a state machine, or the
15 golden part where applicable. The golden part 102 may transmit the test packet based on the simple test command. The DUT 104 may receive and re-transmit the test packet from the golden part 102. However, the DUT 104 may transmit a single packet, only after receiving a single packet from the golden part 102.

20 The test packet may allow the golden part 102 to verify the DUT 104. For example, the DUT 104 may (i) receive the test

0325.00418

CD00117

packet from the golden part 102 and test the packet for corruption;

(ii) compare the packet to ensure an accurate reception; and (iii)

transmit a test packet back to the golden part 102. The golden

part 102 may then test the packet for corruption. The golden part

102 may compare the packet to ensure an accurate transmission

operation of the DUT 104. The reception and transmission of the

test packet may be implemented to verify the DUT 104. Results of

the comparison are generally available on an external pin (e.g.,

DONE) of the golden part 102 and/or the DUT 104 such that a

pass/fail determination can be made. The pass/fail determination

may be indicated by an asserted/deasserted signal.

The test packet sent and/or received by the DUT 104 may

be of any applicable pattern loaded into an internal memory of the

circuit 100 (not shown). Additionally, test packet comparison

logic (not shown) may be shared with the test packet generation

logic (not shown) of the golden part 102, since the data packet is

generally similar in both transmission and reception. The circuit

100 may allow the DUT 104 to transmit a packet to the golden part

102. Additionally, the golden part 102 may validate the packet

received from the DUT 104. In a production test environment,

control of transmission of the packet and the pass/fail signal

0325.00418

CD00117

(e.g., DONE) may be based on a low-speed asynchronous test interface (to be discussed in connection with FIGS. 3 and 4).

By reversing the roles of the golden part 102 and DUT 104, the circuit 100 may allow both the transmission and the reception operations of the DUT 104 to be verified. The circuit 100 may allow both the golden part 102 and the DUT 104 to run with crystals in an asynchronous fashion. The crystals may be different frequencies (e.g., slightly different frequencies, in order of $\frac{1}{2}\%$, 1% difference, sometimes less than $\frac{1}{2}\%$ difference) in order to verify the ability of the DUT 104 to adapt to phase, as well as frequency differences that may be encountered in actual use. The circuit 100 may allow for deviations of frequency on the transmitted or received signals via a number of signals (e.g., DPLUS and DMINUS).

The circuit 100 may provide a special test mode that may allow a standard peripheral part that is normally a target device (e.g., a slave device) to become a host device (e.g., a master device) of a bus. For example, the circuit 100 may allow a slave device to become a host to control testing of a similar slave device. The circuit 100 may verify transmit and receive operations of a test device under test. Additionally, the circuit 100 may

0325.00418
CD00117

allow a non peer-to-peer device to be tested in a peer-to-peer like mode.

Referring to FIG. 2, a block diagram of a method (or process) 200 is shown in accordance with the present invention.

5 The method 200 may be implemented to provide testing of a device. The method 200 may illustrate an exemplary operation of the circuit 100. The method 200 generally comprises a portion 202 illustrating steps of the operation of a device under test and a portion 204 illustrating steps of the operation of a tester operation. The device under test portion 202 may illustrate an operation of a target-only device (e.g., the DUT 104). The tester operation portion 204 may illustrate an operation of a control test replica (e.g, the golden part 102) of the target-only device. The method 200 generally comprises an initialization section 206, a transmit test section 208 and a receive test section 210. The initialization section 206 may initialize the golden part 102 and the DUT 104. The transmit test section 208 may test a transmission operation of the DUT 104. The receive test section 210 may test a reception operation of the DUT 104.

20 The initialization section 206 generally comprises an issue reset block 212 (for the device under test section 202) and

0325.00418
CD00117

an issue reset block 214 (for the tester section 204). The method 200 may be implemented to reset a device under test and a tester device. For example, the method 200 may reset the golden part 102 and the DUT 104. In one example, the reset block 212 and the reset block 214 may be controlled by an external device (e.g., a tester). However, the reset block 212 and the reset block 214 may be controlled by another appropriate device in order to meet the criteria of a particular implementation.

The transmit test block 208 generally comprises a place in transmit mode state 216 (for the device under test portion 202) and a place in receive test mode state 218, a decision block 220 and a decision block 222 (for the tester portion 204). The place in transmit test mode state 216 may place a DUT in a transmit test mode. The place in receive test mode state 218 may place a tester device in a receive test mode. The place in transit mode state 216 and the place in receive mode state 218 may allow a tester device to correctly test a transmit operation of the DUT. The tester portion (e.g., the golden part 102) 204 may control the DUT portion (e.g., the DUT 104) 202 during the transmit test block 208. Additionally, the DUT 102 and/or the tester 104 may be controlled by another appropriate device.

0325.00418
CD00117

The place in transmit test mode state 216 may proceed to the receive test section 210, in response to a predetermined criteria. The place in transmit test mode 216 may proceed to the receive test section 210 in response to a specified time constraint (e.g., a USB time constraint) that may allow sufficient time for the transmit test to occur. However, the system 200 may be configured to respond to an internal signal, external signal, completion signal, etc. in order to meet the criteria of a particular implementation.

The decision state 220 may determine if a "DONE indication" has been received. The DONE indication may be implemented internal to the tester 204. However, the DONE indication may be generated by another appropriate device in order to meet the criteria of a particular implementation. The DONE indication may indicate if a test packet has been correctly received by the tester device. If the DONE indication has been received, the decision block 220 may proceed to the receive test section 210. If the DONE indication is not received, the decision block 220 may move to the decision block 222. The decision block 222 may determine if a "DONE timeout" is to occur. In one example, the DONE timeout may be implemented as a specified time constraint.

0325.00418
CD00117

However, the DONE timeout may be controlled by another appropriate type device. If a DONE timeout is to occur, the decision block 222 generally proceeds to a test failed block 224. If a DONE timeout is not to occur, the decision block 222 may proceed to the decision block 220, repeating the DONE indication process (e.g., the decision blocks 220 and 222).

The receive test section 210 generally comprises a place in receive test mode state 226, a decision state 228 and a decision state 230 (for the device under test section 202) and a place in transmit test mode state 232 (for the tester section 204). The tester 204 may be implemented to control the DUT 202 during the receive test block 210. However, the DUT 202 and/or the tester 204 may be controlled by another appropriate type device. The state 226 may place the DUT in a receive test mode. The decision block 228 may check if a "DONE indication" has been received. The DONE indication may indicate if a test packet has been correctly received by the DUT. The DONE indication may be implemented internal to the DUT 202. However, the DONE indication may be generated by another appropriate type device in order to meet the criteria of a particular implementation. If a DONE indication has been received, the decision block 228 may enter a test passed state

0325.00418
CD00117

234. If a DONE indication is not received, the decision block 228 may enter the decision block 230. If the decision block 230 determines that a "DONE timeout" is to occur, the decision block 228 may enter the test failed block 224. If the decision block 230 determines that a DONE timeout is not to occur, the decision block 230 may move to the decision block 228.

The method 200 may illustrate testing of a target-only device with a replica of the target-only device. For example, the method 200 may illustrate testing of the DUT 104 with the golden part 102. Each state of the method 200 may be independently controlled and/or implemented in order to meet the criteria of a particular implementation. However, in a preferred embodiment, an external tester may control the golden part 102 and/or the DUT 104. The golden part 102 may be configured to perform tests on the DUT 104.

Referring to FIG. 3, a system 300 is shown illustrating a high speed testing device derived from a low speed tester. The circuit 300 may allow testing of a device to be controlled by a low-speed asynchronous test interface. The system 300 generally comprises a conventional low speed tester 302 and a high speed wrapper 304. The high speed wrapper 304 may allow the conventional

0325.00418
CD00117

low speed tester 302 to implement high speed testing of devices.
The high speed wrapper 304 generally comprises a high speed host
emulator 306 and a tester vectors section 308. The high speed host
emulator 306 and the test vectors section 208 may be implemented to
5 perform high speed tests. The high speed wrapper 304 may allow the
conventional low speed tester to test a high speed device.

The conventional low speed tester 302 may have an output
312 that may present a signal (e.g., PASS/FAIL), an output 314 that
may present a transmission signal (e.g., TA), an input 316 that may
receive a reception signal (e.g., RE) and an input that may receive
a signal (e.g., TV). The signal PASS/FAIL may indicate a pass/fail
condition of a DUT 310. The signal PASS/FAIL may be asserted
and/or deasserted to indicate a particular condition of the DUT
310. The test vectors section 308 may generate the signal TV. In
15 one example, the signal TV may be implemented as testing vectors.
However, the signal TV may be implemented as another appropriate
type signal in order to meet the criteria of a particular
implementation. The tester vectors 308 may provide testing vectors
TV to the conventional low speed tester 302 in order to test the
20 DUT 310.

An input 320 of the high speed host emulator 306 may receive the signal TA. An output 322 of the high speed host emulator 306 may present the signal RE. Additionally, the high speed host emulator 306 may have an input/output 324 that may present/receive a signal (e.g., USB). An input/output 326 of the DUT 310 may present/receive the signal USB. In one example, the signal USB may be implemented as a bi-directional high speed interface signal (e.g., a USB bus). However, the signal USB may be implemented as another appropriate type signal (e.g., firewire, etc.) in order to meet the criteria of a particular implementation. The signal USB may allow the conventional low speed tester 302 (via the high speed wrapper 304) to perform verification of the DUT 310.

Referring to FIG. 4, a flow diagram 400 is shown illustrating an operation of the system 300. The flow diagram 400 generally comprises a state 402, a state 404, a decision block 406, a decision block 408, a decision block 410, a decision block 412, a result state 414 and a result state 416. The state 402 may implement the low-speed tester 302 to issue a number of tester vectors to the host emulator 306. The state 404 may implement the host emulator 306 to issue a number of features to the device under test 310. The host emulator may be implemented as a test capable

0325.00418
CD00117

slave device. For example, the host emulator may be implemented as a USB host adapter. The test capable slave device may emulate a host device to transmit test packets. The state 402 and the state 404 may be controlled.

5 The decision block 406 may check to see if an acknowledge signal is received from the device under test 310. If an acknowledge signal is received, the decision block 406 may move to the decision block 410. If an acknowledge signal is not received, the decision block 406 may move to the decision block 410. The acknowledge signal may be generated in response to an acknowledgment packet. The acknowledgment packet may be implemented as a handshake packet. The acknowledgment signal may confirm at a transmit and receive operation of the DUT 310.

10 The decision block 408 may check for a bus turnaround timeout. The bus turnaround timeout may be implemented as a USB specified time constraint that may determine how long after a master device (e.g., the host emulator 306) sends a packet to wait for a target device (e.g., the DUT 310) to respond. The time duration may be short. However, the bulk of the time constraint
15 may be devoted to tester setup and/or setting time. The USB turnaround time is generally 192 bit times (e.g., 384ns). If a bus
20

0325.00418
CD00117

turnaround timeout occurs, the decision block 408 may move to the result block 414 and the device under test 310 fails. If a bus turnaround timeout does not occur, the decision block 408 may move back to the decision block 406. The decision block 410 may check to see if a packet has been received from the device under test 310. If the packet has been received, the decision block 410 may move to the result block 416 and the device under test 310 passes. If a packet has not been received from the device under test, the decision block 410 may move to the decision block 412. The decision block 412 may check for a "DONE timeout". If a DONE timeout has been received, the decision block 412 may move to the result block 414 and the device under test 310 generally fails. If the DONE timeout has not been detected, the decision block 412 may move back to the decision block 410.

The system 100 (or 300) may allow a low-cost, low-speed tester to test a high-speed target-only part. Compared to existing methods, the present invention allows a low-cost tester to verify the high-speed functionality of a complex part. The system 100 (or 300) may allow a target-only (non peer-to-peer) USB device to act as an initiator of test packets. The system 100 may adapt USB 2.0 defined (e.g., required) test modes for implementation in a

production test environment. The system 100 may extend capability of a USB target-only device to verify the reception of a test packet. Additionally, the system 300 may allow high-speed transmit, reception, and response checking to be under control of a low-speed tester-friendly interface.

The system 100 (or 300) may reduce test costs for a cost-sensitive but high-performance part. The system 100 may be applicable to devices for busses that are not peer-to-peer, such that using a golden part to verify a device under test requires the device to support a newly defined peer-to-peer test mode. Using the test method described, the functionality of the part can be verified not only in the ideal environment of a tester (e.g., using a fully synchronous high-speed tester) but is also verified in the more real-world situation of a slightly varying phase and frequency. The circuit 100 (or 300) may provide a level of verification that may be more complete than would be possible with a conventional high-speed tester.

The function performed by the flow diagrams 200 and/or 400 of FIGS. 2 and 4 may be implemented using a conventional general purpose digital computer programmed according to the teachings of the present specification, as will be apparent to those skilled in

the relevant art(s). Appropriate software coding can readily be prepared by skilled programmers based on the teachings of the present disclosure, as will also be apparent to those skilled in the relevant art(s).

5 The present invention may also be implemented by the preparation of ASICs, FPGAs, or by interconnecting an appropriate network of conventional component circuits, as is described herein, modifications of which will be readily apparent to those skilled in the art(s).

10 The present invention thus may also include a computer product which may be a storage medium including instructions which can be used to program a computer to perform a process in accordance with the present invention. The storage medium can include, but is not limited to, any type of disk including floppy disk, optical disk, CD-ROM, and magneto-optical disks, ROMs, RAMs, 15 EPROMs, EEPROMs, Flash memory, magnetic or optical cards, or any type of media suitable for storing electronic instructions.

20 While the invention has been particularly shown and described with reference to the preferred embodiments thereof, it will be understood by those skilled in the art that various changes

0325.00418

CD00117

in form and details may be made without departing from the spirit and scope of the invention.

CLAIMS

1. An apparatus coupled to a low speed tester and a device, wherein said apparatus is configured to allow said low speed tester to perform high speed tests of said device.

2. The apparatus according to claim 1, wherein said low speed tester is further configured to control high-speed transmit, reception and verification of said device.

3. The apparatus according to claim 1, wherein said device comprises a Universal Serial Bus (USB) device.

4. The apparatus according to claim 1, further comprising:

a host emulator configured to interface said device; and
a test vector generator.

5. The apparatus according to claim 4, wherein said low speed tester is configured to control said host emulator.

0325.00418
CD00117

6. The apparatus according to claim 4, wherein said low speed tester is configured in response to one or more test vectors.

7. The apparatus according to claim 6, wherein said test vector generator is configured to generate said one or more test vectors.

8. The apparatus according to claim 1, wherein said apparatus is further configured to test a reception and transmission operation of said device.

9. The apparatus according to claim 1, wherein said apparatus is further configured to initiate one or more test packets.

10. The apparatus according to claim 9, wherein said device is further configured to receive and verify said one or more test packets.

11. The apparatus according to claim 10, wherein said device is further configured to transmit said one or more test packets.

12. The apparatus according to claim 4, wherein said apparatus is further configured to receive and verify said one or more transmitted test packets.

13. The apparatus according to claim 1, wherein said low speed tester is further configured to generate a pass/fail signal.

14. The apparatus according to claim 1, wherein said apparatus is configured to perform at least one test of a plurality of test modes wherein said plurality of test modes comprise USB 2.0 defined test modes for use in a production test environment.

15. An apparatus comprising:
means for testing a device; and
means for configuring a low speed tester to perform high speed tests of said device.

16. A method for testing a device comprising the steps
of:

(A) testing a device; and

(B) configuring a low speed tester to perform high speed
5 tests of said device.

17. The method according to claim 16, wherein said
device under test comprises an USB device.

18. The method according to claim 15, wherein step (B)
further comprises:

configuring said low speed tester to control a host
emulation.

19. The method according to claim 18, wherein step (B)
further comprises:

allowing said host emulator to interface with said device
under test.

20. The method according to claim 16, further comprising
performing at least one of a plurality of test modes wherein the

0325.00418
CD00117

plurality of test modes comprise USB 2.0 defined test modes for use
in a production test environment.

0325.00418
CD00117

ABSTRACT OF THE DISCLOSURE

An apparatus coupled to a low speed tester and a device.
The apparatus may be configured to allow the low speed tester to
perform high speed tests of the device.

100

102

104

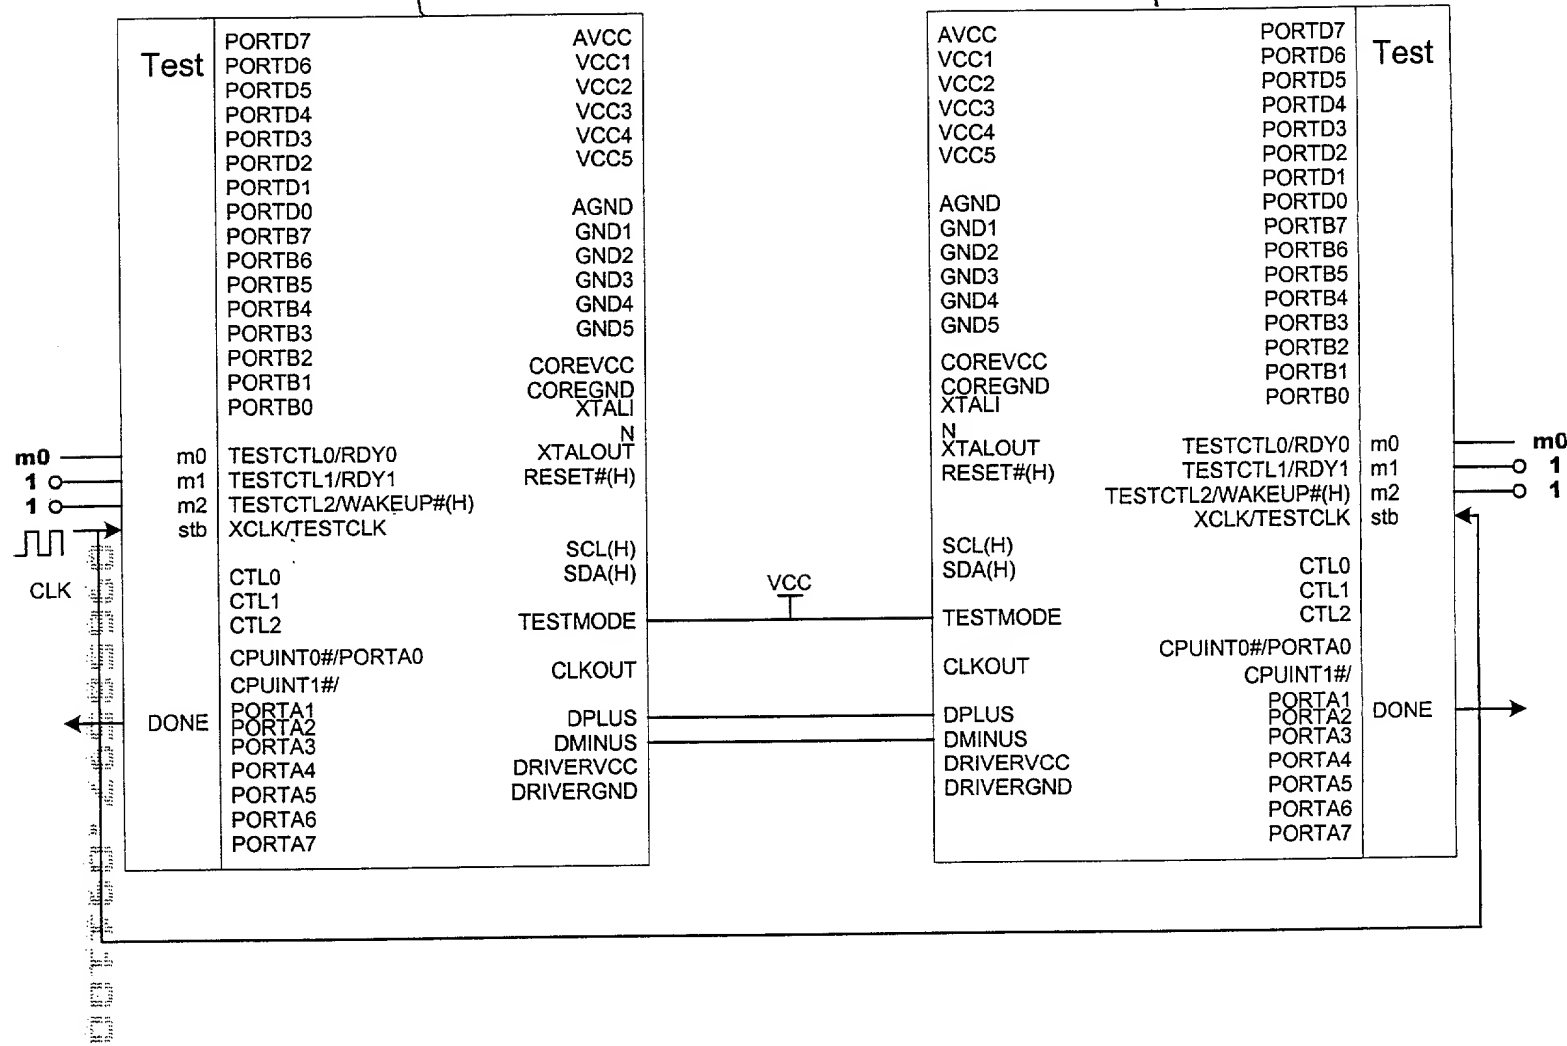


FIG.1

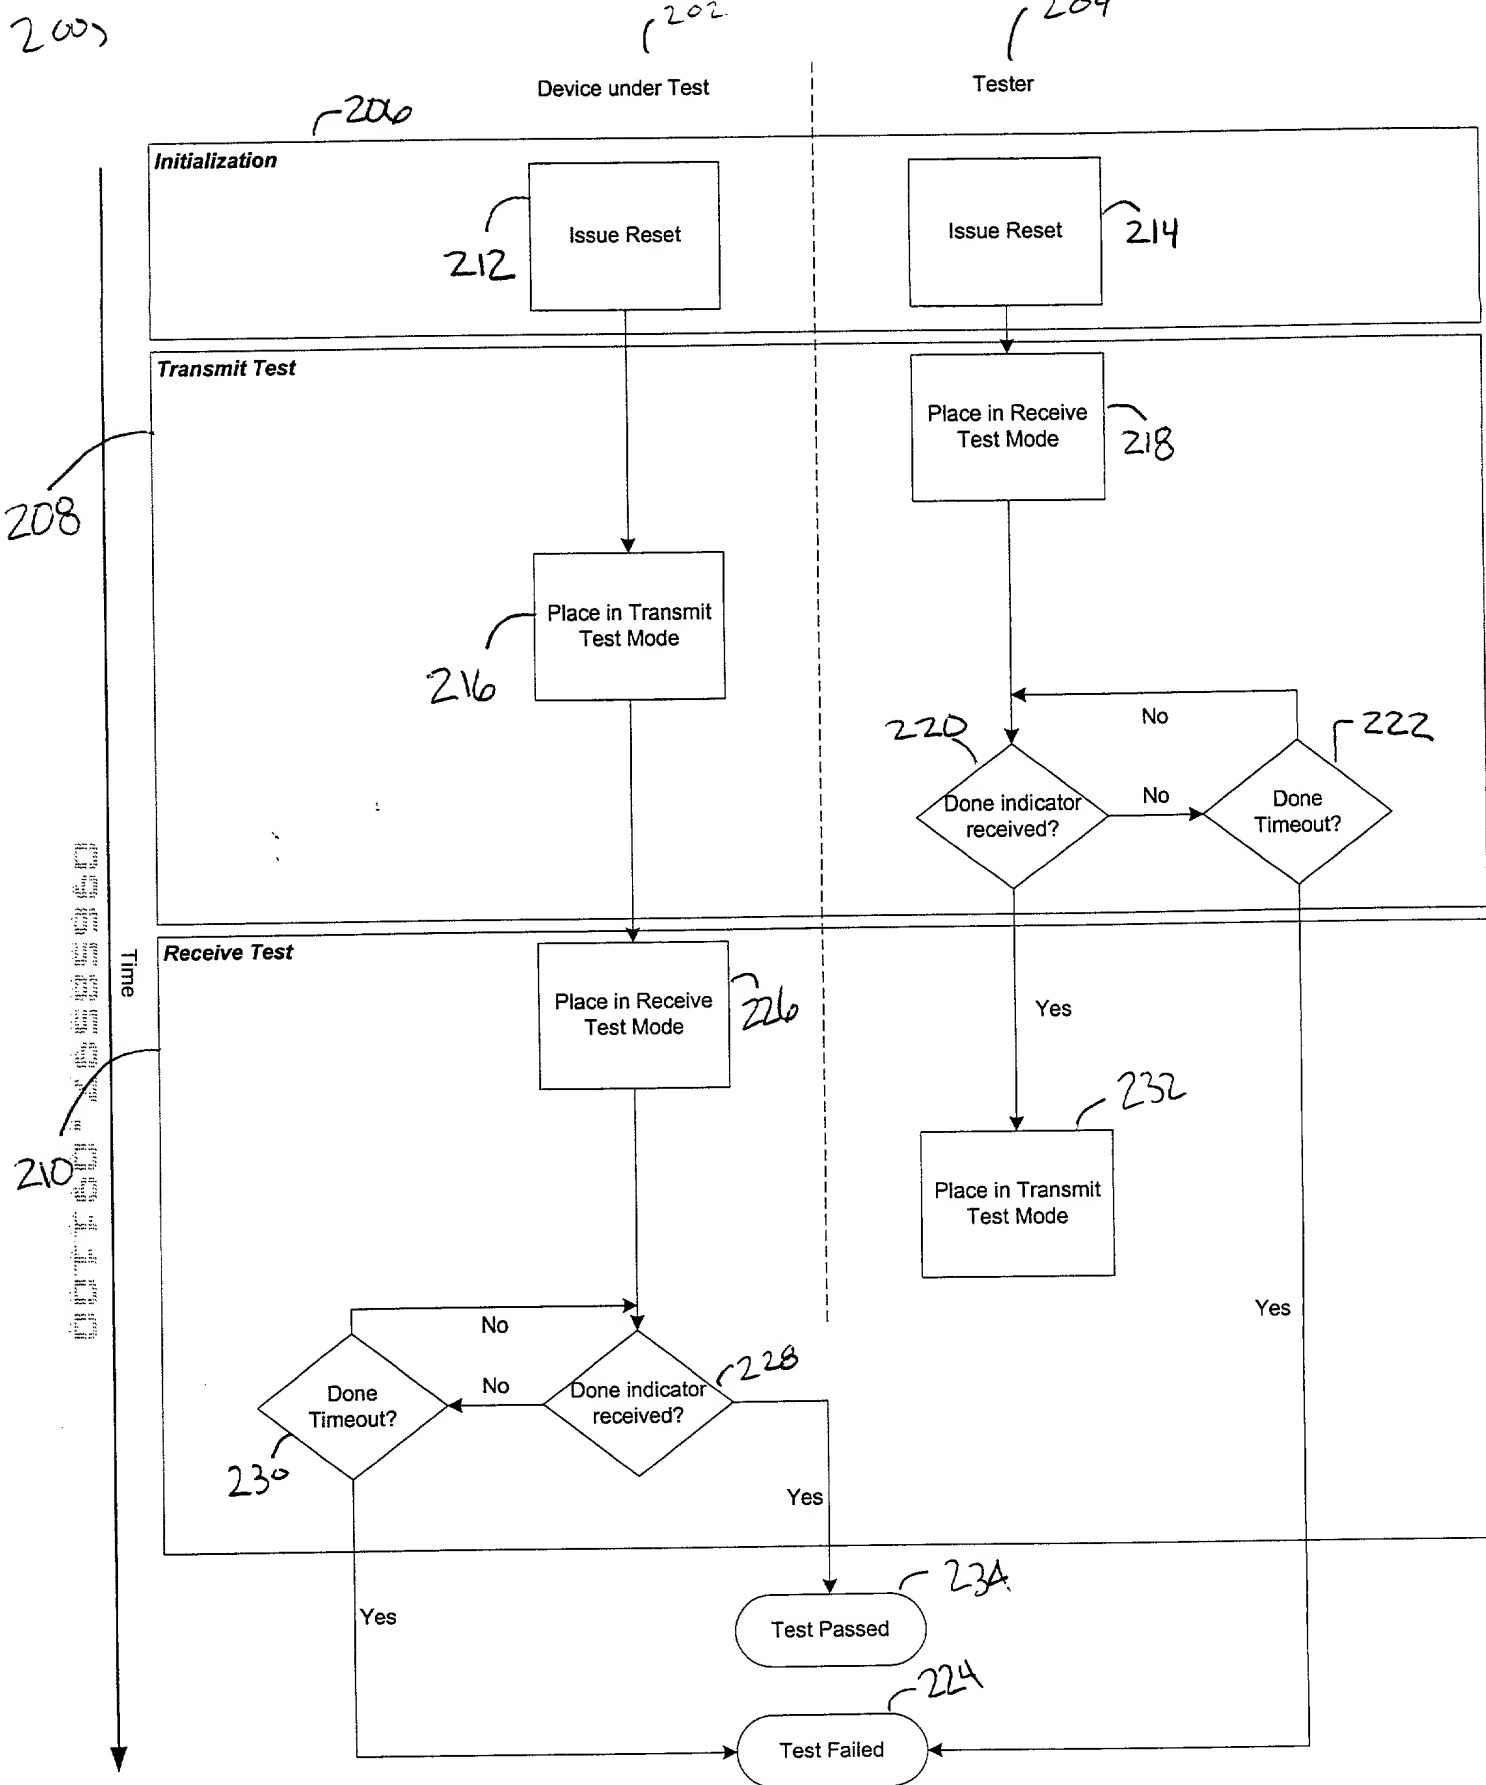


FIG.2

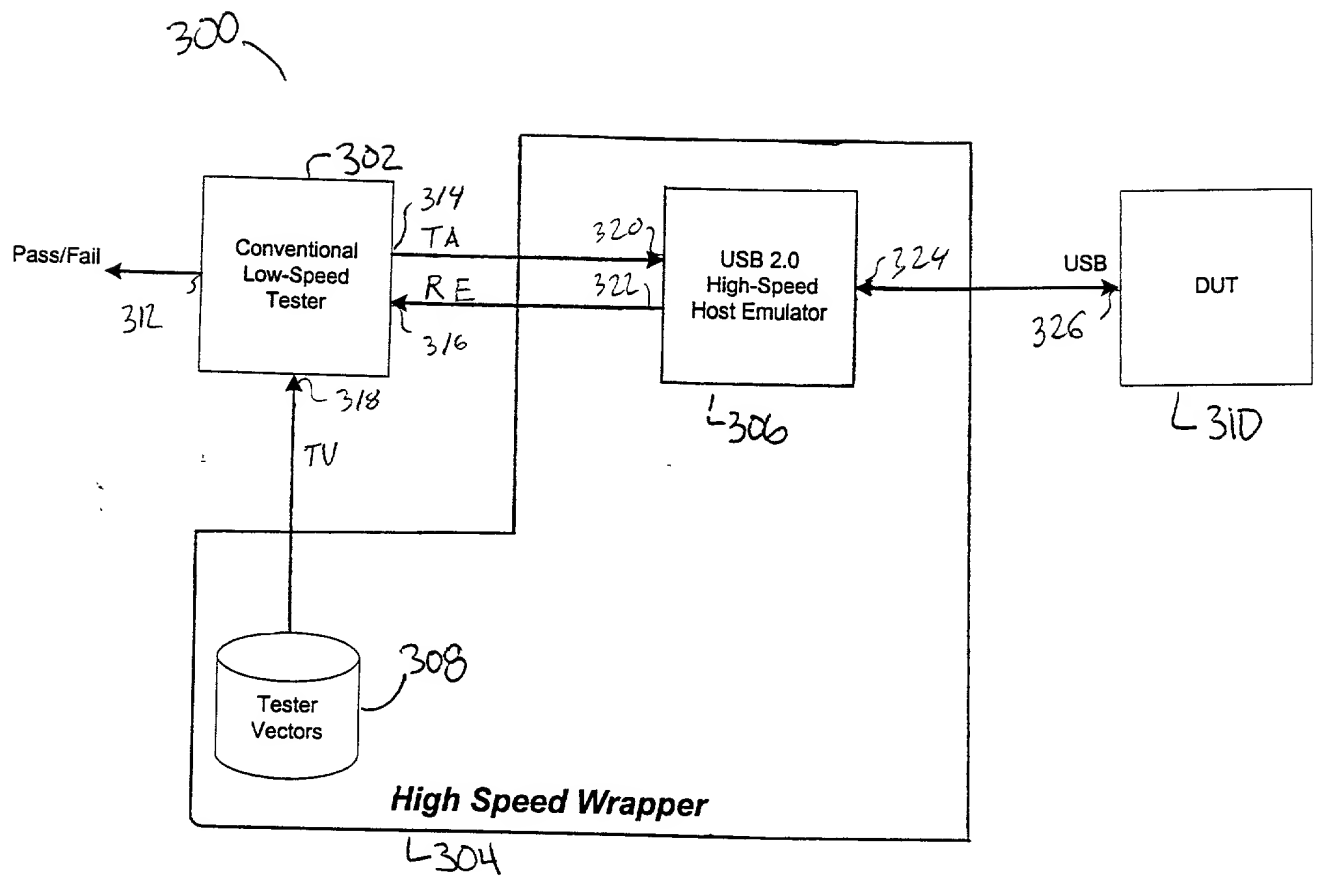


FIG.3

4007

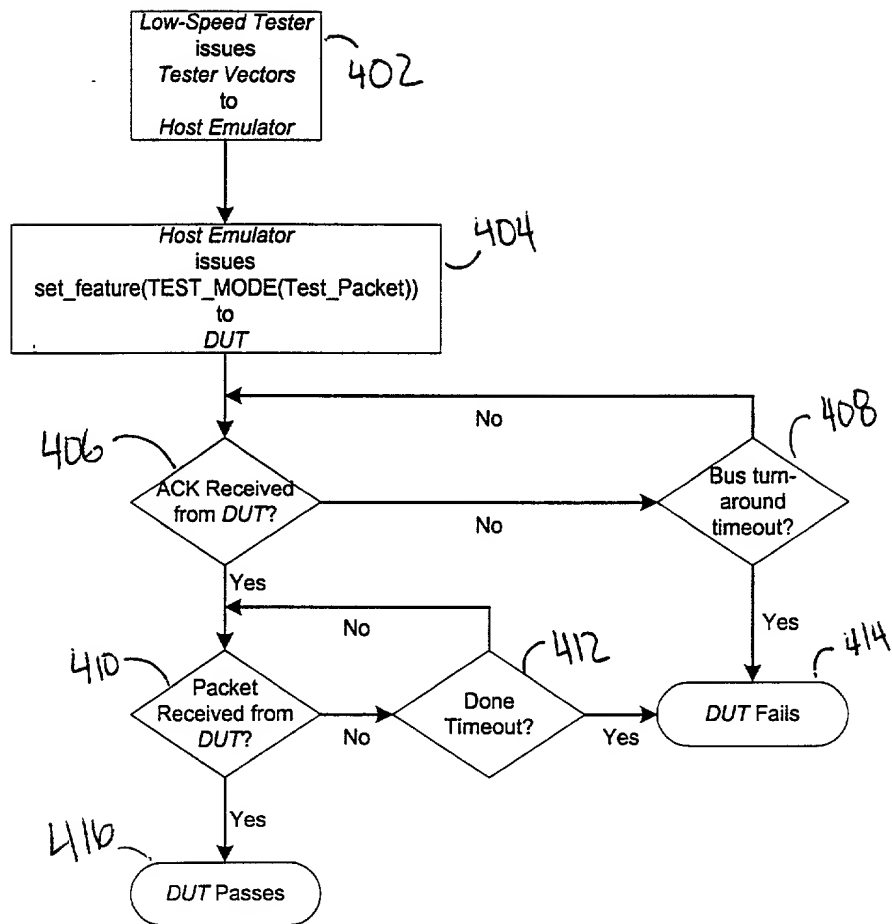


FIG.4

Docket No. 0325.00418

DECLARATION, POWER OF ATTORNEY AND PETITION

We, the undersigned inventors, hereby declare that:

My residence, post office address and citizenship are given next to my name;

We believe that we are the first, original and joint inventors of the subject matter claimed in the application for patent entitled "**UNIVERSAL SERIAL BUS (USB) GOLDEN PRODUCTION TEST MODE**", which:

 X is submitted herewith;

 was filed on as Application Serial No. and amended on ;

We have reviewed and understand the contents of the above-identified application for patent (hereinafter, "this application"), including the claims;

We acknowledge the duty under Title 37, Code of Federal Regulations, Section 1.56, to disclose to the United States Patent and Trademark Office information known to be material to the patentability of this application. We also acknowledge that information is material to patentability when it is not cumulative to information already provided to the United States Patent and Trademark Office and when it either

compels, by itself or in combination with other information, a conclusion that a claim is unpatentable under the preponderance of evidence standard, giving each term in the claim its broadest reasonable construction consistent with the application, and before any consideration is given to evidence which may be submitted to establish a contrary conclusion of patentability, or

refutes or is inconsistent with a position taken in either (i) asserting an argument of patentability, or (ii) opposing an argument of unpatentability relied on by the United States Patent and Trademark Office;

We hereby claim the priority benefit under Title 35, Section 119(e), of the following United States provisional patent applications:

Application No.

Filing Date

We hereby claim the priority benefit under Title 35, Section 120, of the following United States patent applications:

Serial No.

Filing Date

Status

Docket No. 0325.00418

Page 2 of 3

We hereby claim the priority benefit under Title 35, Section 365(c), of the following PCT International patent applications designating the United States:

Application No.Filing Date

Where the subject matter of the claims of this application is not disclosed in the United States or PCT priority patent applications identified above, we acknowledge the duty to disclose information known to be material to the patentability of this application that became available between the filing dates of this application and of the priority United States or PCT patent applications.

We hereby appoint as our attorneys with full power of substitution to prosecute this application and conduct all business in the United States Patent and Trademark Office associated with this application: Customer No. 021363.

**21363**

PATENT TRADEMARK OFFICE

We declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of this application or any patent issuing thereon.

Steven P. Larky

Name of First Joint Inventor

Signature of First Joint Inventor

9/5/00

Date

Post Office Address:

13745 Nogales Drive

Del Mar, CA 92014-3338

Citizen of: United States of America

Residence: 13745 Nogales Drive

Del Mar, CA 92014-3338

Paul D. Berndt

Name of Second Joint Inventor

Signature of Second Joint Inventor

Date

Post Office Address:

P.O. Box 1132

Woodinville, WA 98072-1132

Citizen of: United States of America

Residence:

Woodinville, WA 98072-1132

We hereby claim the priority benefit under Title 35, Section 365(c), of the following PCT International patent applications designating the United States:

Application No.

Filing Date

Where the subject matter of the claims of this application is not disclosed in the United States or PCT priority patent applications identified above, we acknowledge the duty to disclose information known to be material to the patentability of this application that became available between the filing dates of this application and of the priority United States or PCT patent applications.

We hereby appoint as our attorneys with full power of substitution to prosecute this application and conduct all business in the United States Patent and Trademark Office associated with this application: Customer No. 021363.



21363

PATENT TRADEMARK OFFICE

We declare that all statements made herein of our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of this application or any patent issuing thereon.

Steven P. Larky

Name of First Joint Inventor

Post Office Address:

13745 Nogales Drive

Del Mar, CA 92014-3338

Signature of First Joint Inventor

Citizen of: United States of America

Residence: 13745 Nogales Drive

Del Mar, CA 92014-3338

Date

Paul D. Berndt

Name of Second Joint Inventor

Post Office Address:

P.O. Box 1132

Woodinville, WA 98072-1132

Signature of Second Joint Inventor


Citizen of: United States of America

Residence:


Woodinville, WA 98072-1132

Date

9/7/2000

Mike Lewis
Name of Third Joint Inventor

Signature of Third Joint Inventor
9/5/00
Date

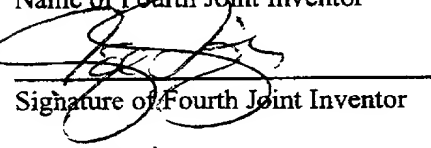Post Office Address: _____
2046 Badger Glen
Escondido, CA 92029
Citizen of: United States of America
Residence: 2046 Badger Glen
Escondido, CA 92029

Scott Swindle
Name of Fourth Joint Inventor

Signature of Fourth Joint Inventor
9/5/00
Date

Post Office Address: _____
4357 Calle Mejillones
San Diego, CA 92130
Citizen of: United States of America
Residence: 4357 Calle Mejillones
San Diego, CA 92130